

CARING FOR YOUR PARQUET



As it is a natural material, wood reacts to changes in ambient conditions.

An r.a.h. (relative air humidity) of 40% to 60% represents an ideal environment for timber floors.

In winter, artificial room heating tends to make the flooring shrink, which can lead to splitting.

Use special humidifiers to prevent the air in the rooms becoming too dry.

Hygrometers and thermometers should also be used to keep an eye on room conditions.

Caring for a pre-finished parquet involves just a few simple rules.

Use a broom or vacuum cleaner for daily cleaning, and stains should be removed with a damp cloth.

Only ever use the recommended cleaners, NEVER ammonia-based products.

Room temperature should be kept at 18-22°, with a relative

humidity of 45-60%; this environment is the key to your parquet's long life and good condition.

We also recommend the use of an air humidifier.

Wear is an inevitable characteristic of a living material such as wood but, over time, it actually contributes to the floor's beauty by creating a 'lived in' feel.

Accidental damage can be avoided by sticking felt pads onto the base of chair legs and any other furniture that is often moved around.

Areas which are most frequently walked over, such as doorways and hallways, can be protected with rugs; flower and plant pots should be provided with suitable bases to prevent water spilling out of them.

The use of quality finishing materials and suitable care products will help to keep the parquet looking good over a long lifetime.

CLEANING AND MAINTENANCE PRODUCTS

QUANTITY

PRICE
€/PACK

DETERSOAP

Soap for standard wood care. Concentrated high-gloss cleaner for oiled, varnished, waxed surfaces. DETERSOAP is a concentrated sanitising and cleansing solution for cleaning glossy treated floors. For all materials (terracotta and stone) and timber treated with waxes, oils and varnishes. PERFORMANCE: the active ingredients contained in the formula guarantee a sanitising and cleansing action while maintaining the treatment's original gloss over time.

1 lt

12,80

CLEANWAX

NEUTRAL
TEAK
WHITE
BLACK

Wax for special wood care. Wax emulsion for preservation of oiled or varnished wood. CLEANWAX is an O/W emulsion containing natural waxes and resins. Wood care product for oiled and varnished surfaces indoors (parquet - furniture - panelling). PERFORMANCE: revives and maintains the protective and aesthetic characteristics of the initial treatment without peeling or wax build-ups. The dry residue that forms the protective layer on the material is non-toxic. No toxic or noxious components released. Self-polishing and repolishable. Yield: 1 lt / 30-40 sqm.

1 lt

23,20

VENETOWAX FOR OILED VENETO ONLY

VENETO WAX is an O/A emulsion of natural wax and resins. Used to maintain oiled wooden surfaces (parquet - furniture - cladding). USE: renews and preserves over time the protective and aesthetic characteristics of the initial treatment without causing film to peel or wax to build up. The dry residue that protects the material is non-toxic; it does not release toxic or harmful substances into the environment. It is self-polishing and can be re-polished. Yield: 1 lt / 30-40 sqm.

1 lt

23,20

LIGNOLUX (EX VELUX)

Solvent solution of mineral and vegetable waxes, for the maintenance of wood treated with oil and wax. Cleaning agent for heavily soiled impregnated surfaces or surfaces treated with oils impregnating; forms a very thin, protective wax film. Yield: 1 lt / 30-40 sqm.

1 lt

25,50

PULITORE INTENSIVO

Concentrated sanitising cleaner for special cleaning. For all treated wooden surfaces. PULITORE INTENSIVO concentrated, water-based detergent solution containing glycols, alcohols, amines, dispersants, sequestrants, anionic and non-ionic surface active agents, and sanitising agents. All materials (terracotta and stone) and timber treated with waxes, oils and varnishes. PERFORMANCE: universal cleaner for special cleansing of oiled and waxed wood, with a wide range of applications depending on the degree of dilution with water. Low-foam detergent. Leaves a pleasant fragrance in the room.

1 lt

13,90

HYDROREP

NEUTRAL
WHITE

DOES NOT ALTER THE NATURAL
MATT FINISH

Waterproofing for floors that have been treated with oil or with a "nature" finish (oiled and varnished). HYDROREP is a spray of waterproof waxes for intensive maintenance of frequently used wooden floors, varnished (solvent or water based), oiled and waxed, and for the extraordinary maintenance of spoiled and/or scratched floors. Hydrorep is also suitable for use on earthenware tiles and stone-based materials for interior decor. The product gives the surface a pleasant natural effect and makes it waterproof. Its special formula renews, maintains, protects and restores spoiled and/or scratched floors. Quantity 0.5 litre bottle. Yield: 1 lt / 30-40 sqm.

1

20,80

KIT DI MANUTENZIONE

The kit contains: a Detersoap bottle, a Cleanwax bottle, a NATUROIL pack, a woollen cloth and a sponge for polishing.

1

80,90

BIOTOP FOR OILED SURFACES ONLY

Water-based dirt- and stain-proof finishing treatment for wooden materials. BIOTOP O/W emulsion containing vegetable wax, paraffin, fatty acid ester, and non-ionic surface-active resin. FIELDS OF USE: all kinds of wooden surfaces indoors (flooring, furniture, structural members). PERFORMANCE: specific finishing treatment for oil/wax-based wood primers. With this water-repellent, stain-proof and dirt-resistant treatment, wooden surfaces are easy to clean and revive, making light work of maintenance, especially on floors. Repolishable and easy to clean. It does not form films or glossy layers. Natural-looking wood finish guaranteed. Formulated in water. No unpleasant odours left. The product's non-volatile residual components are not specifically toxic. No toxic or noxious components released. Yield: 1 lt / 30-40 sqm.

1 lt

28,90

5 lt

26,60

NATUROIL

Ready-to-use repair oil for oiled wooden floors. NATUROIL is an oil for the special care and restoration of areas that have become fatigued or damaged by wear. PERFORMANCE: it nourishes the wood and restores the surface protection, making the priming treatment last longer. Yield: 1 lt / 30-40 sqm.

1 lt

20,80

OIL-WAX PRIMER FOR USE ON WOOD

Oil-wax primer for use on wood installed outdoors. For application to all pre-oiled or untreated outdoor surfaces. Function: Water-repellent primer which forms a protective oil-wax coat resistant to weather and easily restored with no need to re-sand the wood. Coverage:
-On absorbent or coarse-grain wood: 1 lt / 8-10 sqm.
-On unabsorbent and oily wood (teak/iroko): 1 lt / 15-20 sqm.

1 lt

27,80

PARQUET FLOOR CLEANING

ORDINARY MAINTENANCE:

-Varnished floors: use of DETERSOAP (sanitizer)

-Oiled floors: use of DETERSOAP (sanitizer) and CLEANWAX (reviver)

-Waxed floors: use of DETERSOAP (sanitizer) and VELUX (wax/oiled)

DETERSOAP use instructions:

Dilute 1:1-4 parts in warm water: perfect for dirt removal during periodic floor cleaning

Dilute 1:50 – 60 parts equal to 1/3 glasses in 8 - 10 litres in warm water: perfect for daily floor cleaning.

Damp the cloth in the solution obtained and wring out excess water. For oiled or waxed floors, we recommend using 2 water buckets: one to be used with the cleaning solution and the other for rinsing the dirt cloth after every pass on the floor to be cleaned.

Clean the floor thoroughly and evenly. At the end the floor will be clean and sanitised.


EXTRAORDINARY MAINTENANCE:

Contact a professional technician/fitter.



CLEANWAX is a natural wax- and resin-based products. It revives and preserves the protective and aesthetic features of the initial surface treatments without wax building up. It does not release toxic or harmful substances. Cleanwax has different features according to the colour of the oiled surface finish (neutral Cleanwax for natural oiled finish - white Cleanwax for white oiled finish - chestnut-coloured Cleanwax for distressed finish).

CLENWAX use instructions: use instructions: pure on floors previously cleaned using Detersoap (1 litre for a 30-40/ sqm surface). Apply the product using a special cloth for wx application in a thin and even layer avoiding build-up.

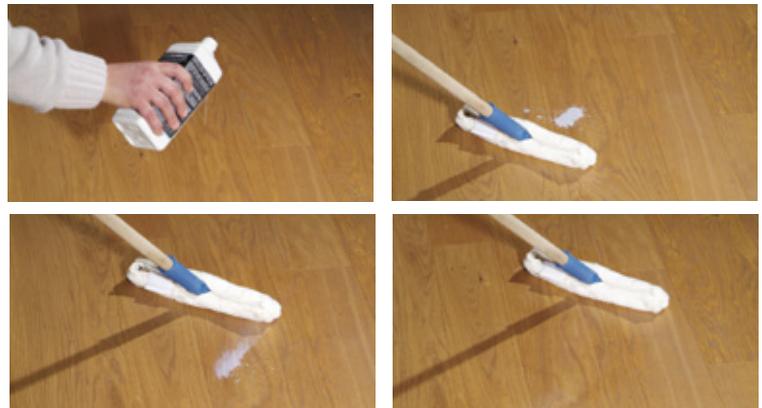

It requires a single application. DO not walk over the floor until it is completely dry (between 15 and 30 minutes depending on the room temperature) in order not to leave foot prints or marks on the floor surface. When completely dry, rub the surface with a wool cloth or use a polisher with felt pads for a more glossy appearance.

Frequency: follow instructions on wax bottle.

LIGNOLUX Solvent solution of mineral. Ideally for regular maintenance and for cleaning of waxed and oiled wood floors treatments. Not suitable for varnished parquets and laminate. Yield: 1lt / 30-40 sqm

LIGNOLUX use instructions:

On floors, spray small quantities of LIGNOLUX on the surface and spread a thin layer of the product with a soft cloth without leaving excess and buff until it is completely dry. Dries quickly (2 - 4 hours in well ventilated rooms). It does not release toxic or harmful substances.